

## RTF Dynamic Retractor (3A)

The self-cleaning, self-inserting spray device that is truly clean-in-place

### Features

- Automated extension and retraction
- Retracted position provides a smooth tank surface
- Hygienic, self-cleaning construction
- Variable flow rate reduces the risk of flooding
- Unique design reduces installation and cavity size of the retracted head
- Complies with 3A Sanitary Standards

### Applications


- 3A Applications
- Mixing tanks
- Process lines or ducts
- Instances where the spray device needs to be removed during production



### Specifications

<b>Material</b>	316L
<b>Spray pattern</b>	270°
<b>Recommended max. radius for cleaning</b>	3 ft
<b>Max. working temp.</b>	203°F (95 °C)


### Spray Coverage




270°

# TrueClean<sup>®</sup> RTF Retractor (3A)

## Consumption

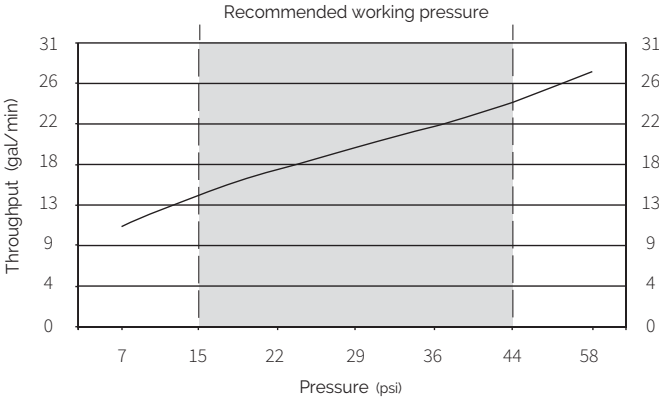


## Spray Head Connection

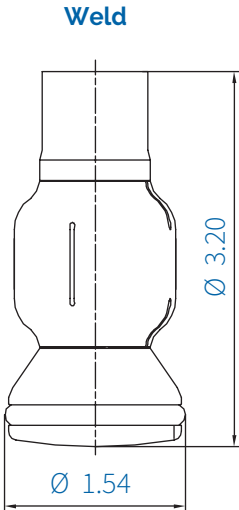


## Dimensions

Stroke Length (s)	L	L1	L2
4	20	16	7
6	26	20	9
10	38	28	13
20	67½	47¾	22¾

## Extended

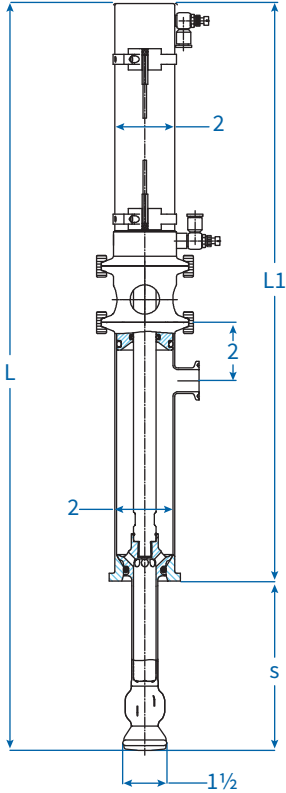

## Retracted

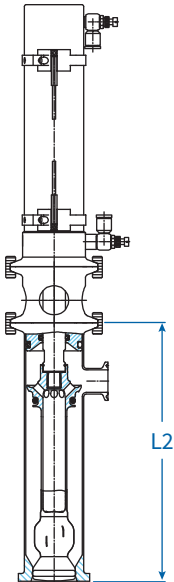

All dimensions are shown in inches.

# TrueClean® RTF Retractor (3A)

## Connections

