

S10

Effective, economical cleaning for any size tank

Features


- High-impact spray for strong cleaning
- Hygienic, self-cleaning construction
- Dual bearings allow for mounting at any angle
- Multiple spray patterns for targeted cleaning
- Increased mechanical action reduces CIP time and costs

Applications

- Static spray ball replacement
- Heavily soiled tank surfaces
- Higher pressures, lower flow



Spray Coverage



360°


Specifications

Material	316L
Connection	Thread, Weld
Spray pattern	360°
Recommended max. radius for cleaning	1.5 ft
Pressure	22 – 44 psi
Flow Rate	1 – 1.4 gpm
Bearing	Double ball bearing*
Mounting positions	360°
Max. working temp.	446 °F (230 °C)

*Hastelloy® C-22® available upon request

TrueClean[®] S10

Consumption

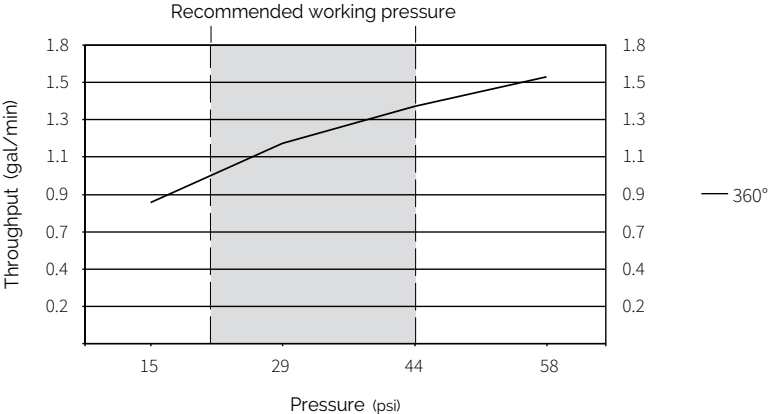

Measuring Temperature: approx. 77 - 86 °F. Measuring Medium: Water
 These curves correspond to the S10 with thread connection

Dimensions

Connection	Type	D1	D2	H	Weight (oz)
Weld	Series A (DIN)	0.31	0.39	2	0.5
Thread	DIN 13 T.1	M5	3/8	1	0.25

All dimensions are shown in inches.

