

S20

Effective, economical cleaning for any size tank

Features


- High-impact spray for strong cleaning
- Hygienic, self-cleaning construction
- Dual bearings allow for mounting at any angle
- Multiple spray patterns for targeted cleaning
- Increased mechanical action reduces CIP time and costs

Applications


- Static spray ball replacement
- Heavily soiled tank surfaces
- Higher pressures, lower flow




Spray Coverage




90° down



180° down



270° up



360°


Specifications

Material	316L
Connection	Thread, Weld
Spray pattern	90°, 180°, 270°, 360°
Recommended max. radius for cleaning	2.5 ft
Pressure	22 – 44 psi
Flow Rate	3.5 – 5.7 gpm
Bearing	Double ball bearing*
Mounting positions	360°
Max. working temp.	446 °F (230 °C)

*Hastelloy[®] C-22[®] available upon request

TrueClean[®] S20

Consumption

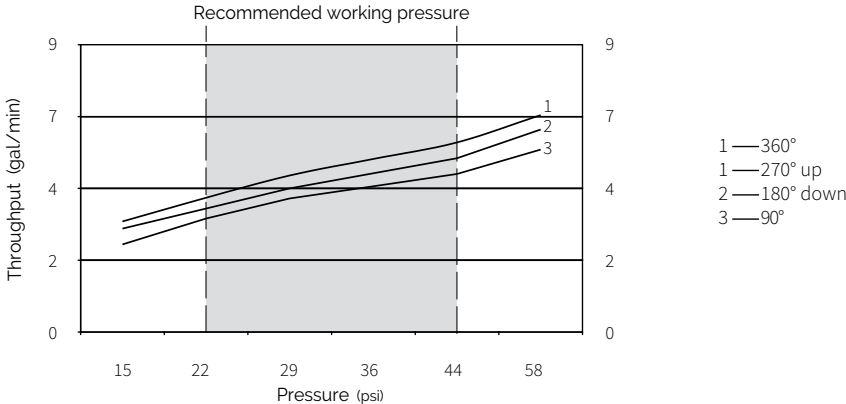

Measuring Temperature: approx. 77 - 86 °F. Measuring Medium: Water
 These curves correspond to the S20 with thread connection

Dimensions

Connection	Type	D1	D2	H	Weight (oz)
Weld	Series C (ASME)	1/2	11/16	2¾	1.7
Thread	NPT	1/8	11/16	1¾	1

All dimensions are shown in inches.

