

SF (3A)

Effective, economical cleaning for any size tank

Features


- High-impact spray for strong cleaning
- Hygienic, self-cleaning construction
- Multiple spray patterns for targeted cleaning
- Increased mechanical action reduces CIP time and costs
- 3A Compliant

Applications

- Static spray ball replacement
- Heavily soiled tank surfaces
- Higher pressures, lower flow
- 3A Applications



Spray Coverage



270° up




Specifications

Material	316L
Connection	Pin, Weld
Spray pattern	270°
Recommended max. radius for cleaning	5 ft
Pressure	15 – 44 psi
Flow Rate	14 – 26 gpm
Max. working temp.	203 °F (95 °C)

TrueClean[®] SF (3A)

Consumption

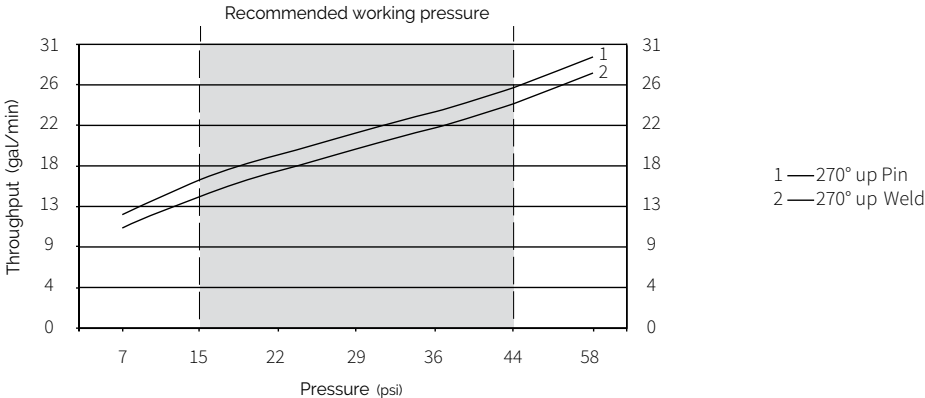

Measuring Temperature: approx. 77 - 86 °F. Measuring Medium: Water

Dimensions

Connection	Type	D1	D2	H	Weight (oz)
Pin	Series C (ASME)	0.76	1 3/8	2 3/4	4
Weld	Series C (ASME)	1	1 3/8	2 3/4	4

All dimensions are shown in inches.

