



S Series & SF

Effective, economical
cleaning for any size tank

Features


- High-impact spray for strong cleaning
- Hygienic, self-cleaning construction
- Double bearings allow for steady 360° rotation and a variety of mounting orientations
- Multiple spray patterns for targeted cleaning
- Increased mechanical action reduces CIP time and costs
- SF model is 3-A compliant

Applications

- Static spray ball replacement
- Heavily soiled tank surfaces
- 3-A applications (SF only)
- Higher pressures, lower flow

TrueClean® S Series & SF

S Series

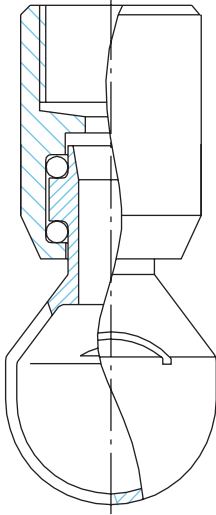


TrueClean® S Series

Material	316L, Hastelloy® C-22®
Connection	Pin, thread, weld
Bearing	Double ball bearing*
Spray pattern	90°, 180°, 270°, 360°
Cleaning radius	1.5 – 10 ft
Pressure	22 – 44 psi
Flow rate	1 – 79 gpm

*Hastelloy® C-22® available upon request

SF

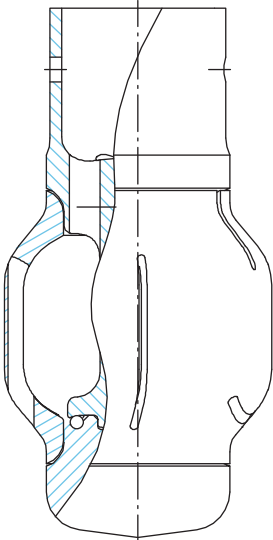

TrueClean® SF

Material	316L, PEEK
Connection	Pin, weld
Bearing	Slide bearing
Spray pattern	270°
Cleaning radius	1 – 5 ft
Pressure	15 – 44 psi
Flow rate	14 – 26 gpm